



# tubra®-Verteilermodul DN 32 (VM 2-4)

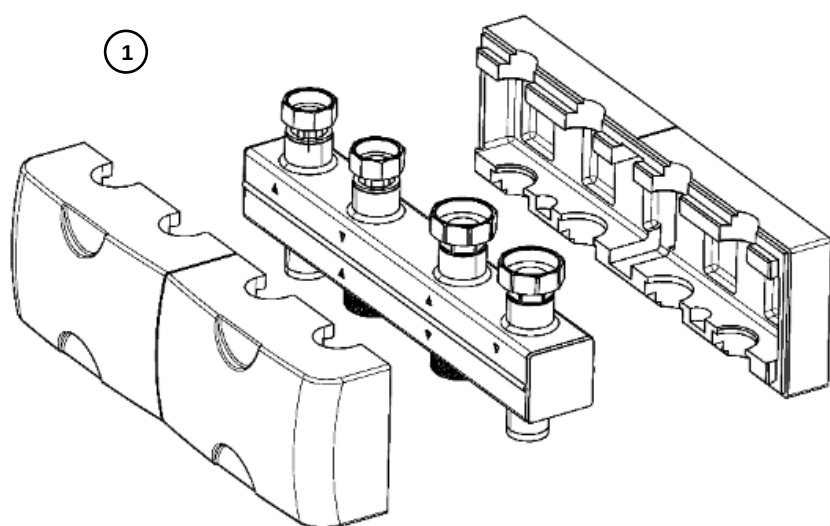

 optional

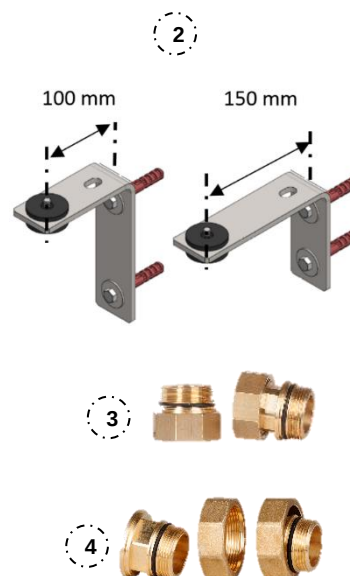

| Pos. | Nr.:         | Product            | B*H*T             | U   | X   | Y   | W   | kW  | m³/h | Z   | C        | D    |
|------|--------------|--------------------|-------------------|-----|-----|-----|-----|-----|------|-----|----------|------|
| 1    | 658.32.25.00 | tubra®-VM-2 DN32   | 570*170*163       | 162 | 160 | 125 | 410 | 195 | 8,5  | 285 | G 1 1/4" | G 2" |
|      | 658.32.35.00 | tubra®-VM-3 DN32   | 855*170*163       | 162 | 160 | 125 | 695 | 195 | 8,5  | 428 | G 1 1/4" | G 2" |
|      | 658.32.45.00 | tubra®-VM-4 DN32   | 1140*170*163      | 162 | 160 | 125 | 730 | 195 | 8,5  | 286 | G 1 1/4" | G 2" |
| 2    | 659.25.32.00 | tubra®-WH 100/150  | 175*125*50        | -   | -   | -   | -   | -   | -    | -   | -        | -    |
| 3    | 600.24.10.00 | tubra®-Adapt. DN25 | G 1 1/4" – 1 1/2" | -   | -   | -   | -   | -   | -    | -   | -        | -    |
| 4    | 600.31.10.00 | tubra®-Adapt. DN32 | G 1 1/4" – 2"     | -   | -   | -   | -   | -   | -    | -   | -        | -    |

P<sub>max</sub>: 6 bar  
T<sub>max</sub>: 110°C

